










BI-ENERGY



Diesel
18,2 kW



Single-phase
Electric motor
230VAC - 3 kW

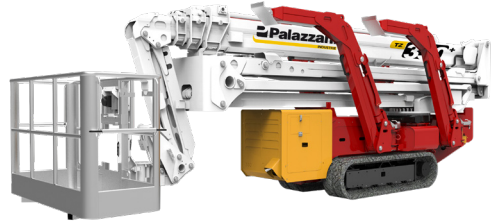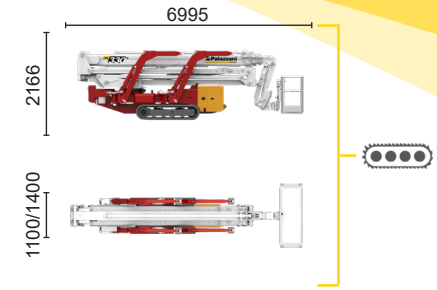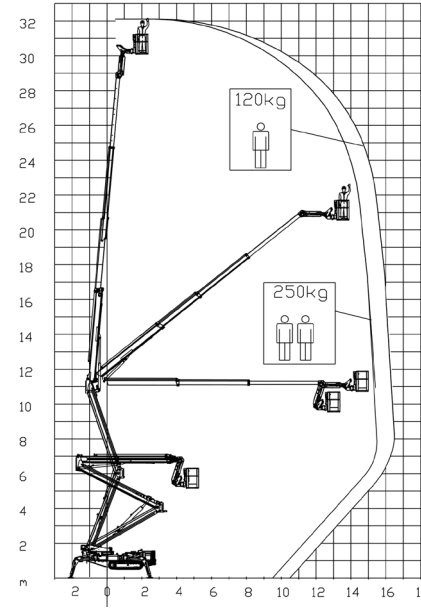

15,4 m	16,4 m	9,5 m	L1	L2	W1	W2	W3
250 kg	120 kg	250/120 kg	4725 mm	6170 mm	4910 mm	4020 mm	3130 mm



TZ 330+/C 32 m 16,4 m 250 kg 360° 180x70 cm 90°+90° 3,13-4,9 m 18% 32% 2,4 km/h 7200 kg 49 kN 3,1 kN/m² 5,72 kN/m²

Available power options:

BI-ENERGY (DIESEL+AC)

ECO (AC+BATTERY)

HYBRID (DIESEL+AC+BATTERY)

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



QUALITY SYSTEM
CERTIFIED BY BUREAU VERITAS
= ISO 9001=



NC 851 A 22





TZ 330+

SPIDER LIFT

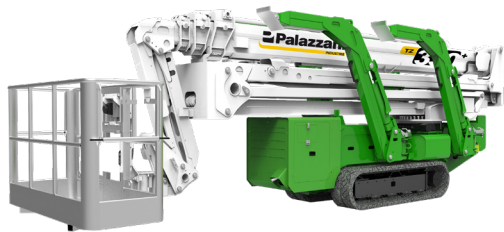






ECO



Single-phase
Electric motor
230VAC - 16 kW



Lithium iron
phosphate battery
LiFePO4
48V - 315 Ah

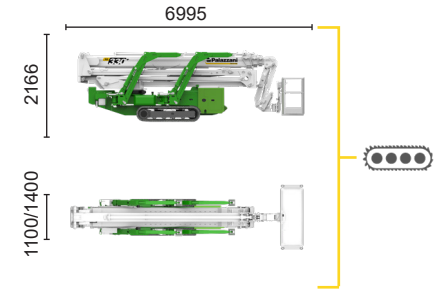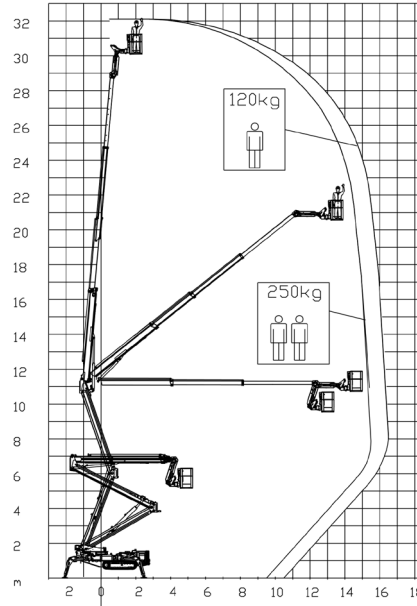

15,4 m	16,4 m	9,5 m	L1	L2	W1	W2	W3
250 kg	120 kg	250/120 kg	4725 mm	6170 mm	4910 mm	4020 mm	3130 mm



TZ 330+/C 32 m 16,4 m 250 kg 360° 180x70 cm 90°+90° 3,13-4,91 m 18% 32% 2,4 km/h 7200 kg 49 kN 3,1 kN/m2 5,72 kN/m2

Available power options:

BI-ENERGY (DIESEL+AC)

ECO (AC+BATTERY)

HYBRID² (DIESEL+AC+BATTERY)

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



QUALITY SYSTEM
CERTIFIED BY BUREAU VERITAS
= ISO 9001 =

NC 852 A 22










HYBRID²

Diesel
14,7 kW

Single-phase
Electric motor
230VAC - 16 kW

Lithium iron
phosphate battery
LiFePO4
48V - 315 Ah

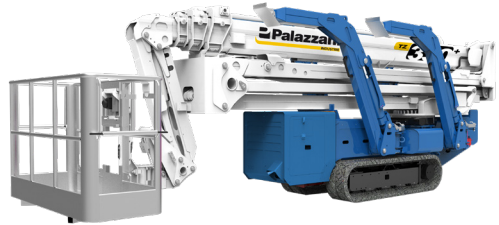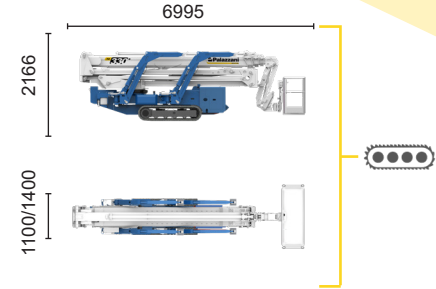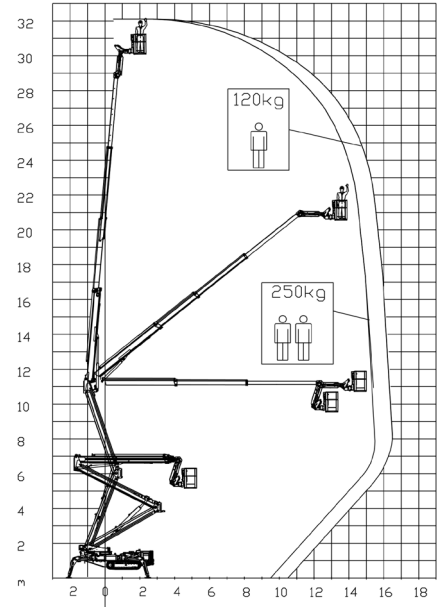

15,4 m	16,4 m	9,5 m	L1	L2	W1	W2	W3
250 kg	120 kg	250/120 kg	4725 mm	6170 mm	4910 mm	4020 mm	3130 mm



TZ 330+/C 32 m 16,4 m 250 kg 360° 180x70 cm 90°+90° 3,13-4,91 m 18% 32% 1,8 km/h 7640 kg 49 kN 3,22 kN/m² 5,92 kN/m²

Available power options:

- BI-ENERGY** (DIESEL+AC)
- ECO** (AC+BATTERY)
- HYBRID²** (DIESEL+AC+BATTERY)

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.
Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073
info@palazzani.it
www.palazzani.it



QUALITY SYSTEM
CERTIFIED BY BUREAU VERITAS
= ISO 9001 =



NC 853 A 22